tavo™



NUNG

Designed around your life



IMPORTANT! KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE: READ CAREFULLY

Contents

Product Information	
Warranty	4
Contact	4
Child Usage Requirements	5
Warnings	6
Parts List	10
Product Set Up	12
Product Use	18
Accessory	
TAVO Rain Cover	26
KLIK plus Infant Carrier	28
Cleaning and Maintenance	30

Product Information

1odel Number:
1anufactured in (date):

The model number and the manufactured in date are located on a label on the stroller frame.

Warranty

We have purposely designed our high-quality products so that they can grow with both your child and your family. Because we stand by our product, our gear is covered by a custom warranty per product, starting from the day it was purchased. Please have the proof of purchase, model number and manufactured in date available when you contact us.

For warranty information please visit: www.nunababy.com/warranty

Contact

For replacement parts, service, or additional warranty questions, please contact our customer service department.

APB Pty. Ltd. 82 Bellingara Road Miranda NSW 2228 Ph: 02 8543 5570

Distributed in Australia by Baby Bunting Pty. Ltd. 955 Taylors Road Dandenong South Vic 3175

Child Usage Requirements

This stroller is suitable for use with children who meet the following requirements:

Weight: up to 22.7 kg maximum Height: 114.3 cm or less

When using the stroller frame with the KLIK plus infant carrier, refer to the child usage requirements listed in its instruction manual.

∆WARNING

TO AVOID INJURY OR DEATH: ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.

DO NOT LEAVE CHILDREN UNATTENDED. ALWAYS KEEP CHILD IN VIEW WHILE IN STROLLER.

SECURE THE CHILD IN THE HARNESS AT ALL TIMES.

USE THIS HARNESS AT ALL TIMES.

ALWAYS USE THE CROTCH COMBINATION WITH THE WAIST BELT. IT IS SUGGESTED THAT THE SHOULDER HARNESSES BE USED AS WELL.

DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.

MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER.

TO AVOID SERIOUS INJURY FROM FALLING OR SLIDING OUT, ALWAYS USE SEAT BELT.

USE THIS TETHER STRAP TO STOP THE STROLLER ROLLING AWAY.

Ensure that all the locking devices are engaged before use.

Do not let your child play with this product.

Never leave the harness buckled when not fitted to a child in the stroller because the harness can form loops which may pose a strangulation hazard.

It is unsafe to use accessories other than those approved by the vehicle manufacturer.

Adult assembly required.

Use the stroller with a child weighing no more than 22.7 kg. It will cause damage to the stroller with an unfitted child.

To prevent a hazardous, unstable condition, do not place more than 4.5kg in the storage basket.

Overloading, folding incorrectly, or using component parts from other manufacturers may cause the stroller to be damaged, broken or unsafe. Please read the instruction manual carefully.

Please read all the instructions in the manual before using the product. Please save instruction manual for future use. Failure to follow these warnings and instructions may result in serious injury or death.

Safety belts and restraint system must be used correctly.

Child may slip into leg openings and be strangled if the harness is not used.

Never use stroller on stairs or escalators.

The stroller not be used near an open fire or exposed flame.

Never allow your child to stand on the stroller or sit in the stroller with head toward front of stroller.

Never place the stroller on roads or dangerous area.

The stroller is designed for use on flat or gently sloping surfaces and may be unstable on higher sloping and uneven surfaces, and users should be made aware of the possibility of the stroller tipping over.

Do make sure all parts are assembled and fastened properly before using the stroller.

To avoid strangulation, do not place items with a string around your child's neck, suspend strings from this product, or attach strings to toys.

To prevent tipping, do not put anything on the handle. Always lift the child in and out of the stroller.

Do not lift stroller while child is in stroller.

Do not use storage basket as a child carrier.

To prevent tipping, never let child climb the stroller.

To avoid finger entrapment or injury to the body, use care when folding and unfolding the stroller.

Be sure the stroller is fully open or folded before allowing child near the stroller.

To ensure your child's safety, please make sure all parts are assembled and fastened properly before using the stroller.

Check that the infant child restraint attachment device is correctly engaged before use.

To avoid strangulation, do make sure your child is clear from the canopy.

Discontinue using your stroller if it is damaged or broken.

Stroller to be used only at walking speed. This product is not intended for use while jogging.

To avoid suffocation, remove plastic bag and packaging materials before using this product. The plastic bag and packaging materials should then be kept away from babies and children.

This product is not suitable for running or skating.

Stroller designed to be used from birth shall recommend the use of the most reclined position for new born babies.

The parking device must be engaged when placing and removing children.


Please ensure that the storage latch has been properly locked, before lifting or moving the stroller.

Parts List

Make sure all parts are available before assembly. If any part is missing, please contact Nuna (see page 4 for information). No tools are required for assembly.

- ! CHOKING HAZARD: Remove and immediately discard protective end caps from each wheel and wheel hub axle.
- f Front Wheel (x2)
- 2 Rear Wheel (x2)
- 3 Arm bar
- 4 Brake Assembly
- **5** Canopy
- 6 Canopy Visor
- 7 Seat Pad
- 8 Arm Bar
- 9 Calf Support
- 10 Front Wheel
- 11 Rear Wheel
- 12 Buckle
- 13 Shoulder Harness Pads

- **14** Handle Adjustment Button
- 15 Insert
- 16 Handle
- **17** Folding Button
- **18** Infant Carrier Lock
- 19 Tether Strap
- 20 Recline Adjustment Button
- 21 Storage Basket
- 22 Brake Lever
- 23 Brake Assembly
- 24 Rain Cover

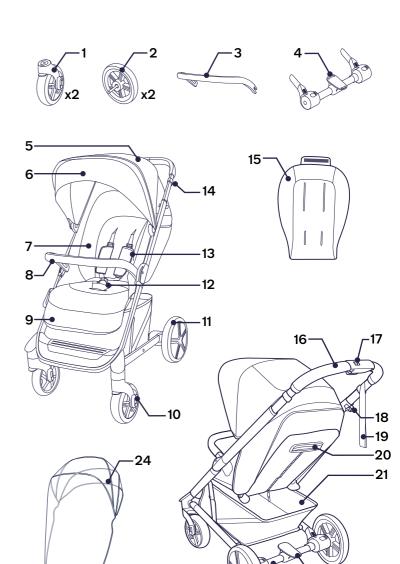

Product Set Up

Open Stroller

- 1 Open the storage latch as shown.
- 2 Rotate the handle to the rear of the stroller. A "click" sound means the stroller frame is open completely. Check that the stroller is completely latched open before continuing.

Front Wheels


- 3 Insert the front wheel into the front leg. A "click" sound means the wheel is assembled completely.
 - Check the wheel is securely attached by pulling out. Repeat on opposite side.
- **4** To remove the front wheel, slide the release button out (1) and then detach the front wheel from the front leg (2).

Brake Assembly


Make sure the brake lever is up before attaching the brake assembly to the frame.

5 - Push the brake assembly onto the rear leg tubes. A "click" sound means the brake assembly is attached. Check that brake assembly is securely attached by pulling on it.











Rear Wheels

- 1 Insert the rear wheel into the rear leg. A "click" sound means the rear wheel is assembled completely. Repeat on opposite side.
 - Check that the wheels are securely attached by pulling on them.
- 2 To remove the rear wheel, press the release button (1) and detach the rear wheel from the rear leg (2).


Storage Basket


3 - Wrap the basket flap around the rear frame and fasten the 3 snaps.


Arm Bar


- ! Always secure the child with the harness. The arm bar is not a restraint device.
- **4** Align the arm bar ends with the arm bar mounts, and insert until it clicks into place. A "click" sound means the arm bar is assembled completely.
- **5** To remove the arm bar, press the arm bar release buttons (1), and lift the arm bar up. (2)













Canopy

- 1 Slide the canopy mounts onto the stroller.
- **2** Then zip the canopy fabric to the back of the stroller seat.

Check Set Up

- Stroller frame is latched open
- Rear and front wheels securely attached
- Canopy mount attached to Stroller frame and canopy zipped to seat pad
- ☐ Basket securely attached
- Arm bar securely attached
- Canopy securely attached





Product Use

Securing Your Child


- Push the center button on the buckle to release the buckle latch, remove the clips and place your child in the stroller.
- 2 Connect the shoulder buckle and hip buckle.
- **3** Secure the shoulder buckle and hip buckle to the buckle latch and repeat on the opposite side.
- **4** Fit the harness snugly to your child by pulling the adjustment straps to tighten (1). Then pull the waist adjustment straps out (2).


Shoulder Harness Position


- **5** The upper shoulder harness buckles can be moved up and down for added adjustment.
- ! To avoid serious injury from falling or sliding out, always secure your child with harness.

Make sure your child is snugly secured. The space between the child and the shoulder harness should be about the thickness of one hand.


DO NOT cross the shoulder belts. This will cause pressure on child's neck.













Canopy


- **1** To open the canopy, pull the canopy toward the front of the seat, and to close the canopy, push it back.
- **2** For added ventilation, flip the canopy window cover up.
- **3** For extra shade, unzip the front zipper and pull the dream drape[™] down.
- **4** For added air flow, unzip the top zipper to expose the mesh. Roll the fabric flap up and secure using the webbing.
- **5** To access the child from the back of the stroller, unzip the bottom zipper. Roll the fabric flap up and secure using the webbing.
- **6** To remove the canopy, unzip both zippers in the back and then slide the canopy mounts up.














Recline


There are 4 recline positions.


- **1** To recline the backrest, squeeze the backrest adjustment handle and pull the backrest down. To raise the recline, push up.
- ! Make sure the recline is adjusted properly for use.

Calf Support

The calf support has 2 positions.

2 - To raise the calf support, lift up. To lower the calf support, press the adjustment button in the middle of the calf support (1), and push down (2).





Front Swivel Locks

It is recommended to use the front swivel locks on uneven surfaces.

- **1** Pull the front swivel lock up to lock the front wheel forward facing.
- 2 Push the front swivel lock down to unlock.

Brake

- **3** To lock the rear wheels, step down on rear of the brake lever.
- **4** To unlock the rear wheels, step down on front of the brake lever.
- ! Always apply the brake when the stroller is stopped. Push the stroller slightly to ensure the brake is engaged.

Handle


The handle has 4 positions.


5 - To adjust the height of the handle, pull the handle adjustment buttons up (1) and then pull the handle up or down (2).


Use Tether Strap


6 - Use the tether strap to prevent the stroller inadvertently rolling away. Check that when your hand is through the loop, it allows you to easily control the stroller.














Fold

Before folding, push the canopy to the rear of the stroller.

- To engage the folding buttons, slide the top folding button (1) and then squeeze the bottom folding button (2).
- **2** While the folding buttons are engaged, rotate the handle forward.
- **3** The storage latch will engage automatically when the stroller is completely folded.
- **4** You can carry the stroller by lifting its handle.
- ! Ensure the storage latch is engaged when lifting or carrying the stroller.

Accessory

! Not all accessories are included on some models.


TAVO Rain Cover


- **5** To assemble the rain cover, place it over the stroller.
- ! Always check ventilation, especially in hot weather when the rain cover is on the product.

ALWAYS check that the rain cover has been cleaned and dried before folding.

DO NOT fold the stroller when the rain cover is attached.


DO NOT place your child into the stroller assembled with rain cover in hot weather.














Klik plus Infant Carrier (sold separately)

For infant carrier assembly and usage, please refer to the infant carrier instruction manual.

- ! Recline the stroller seat to the lowest position, push the canopy to the rear of the stroller and attach the arm bar.
- 1 To open the infant carrier lock, slide the latch out (1). To close the infant carrier lock, slide the latch in (2).
- **2** Open the infant carrier lock and place the infant carrier on the stroller so it sits over the arm bar. Then close the infant carrier lock.
- Pull up on the infant carrier to check that it is fully locked to the stroller.
 - Remove the infant carrier before folding.
- **3** To remove the infant carrier, open the infant carrier lock, squeeze the stroller release handle (1) and lift the infant carrier up (2).







Cleaning and Maintenance

Clean the frame, plastic parts, and fabric with a damp cloth, but do not use abrasives or bleach. Do not use silicon lubricants as they will attract dirt and grime. Do not store your stroller in a damp place.

Clean the stroller wheels regularly with water and remove any dirt.

To ensure long-lasting use, wipe off this product with a soft, absorbent cloth after using it in rainy weather.

Refer to the care label attached to the fabric for washing and drying instructions.

It is normal for fabric to color from sunlight and to show wear and tear after a long period of use, even when used normally.

For reasons of safety, only use original Nuna parts.

Check regularly if everything functions properly. If any parts are torn, broken, or missing, stop using this product.





Find out more at nunababy.com